

Modeling Efficiency in the Energy Commission Demand Forecast: Summary of Current Methods

Workshop for the Integrated Energy Policy Report August 12, 2008

Demand Analysis Office
California Energy Commission




Purpose of Staff Presentation

- Review of CEC Model Structure
- Review of Historic and Forecast Standards Impact Quantification
- Explanation of Additional Conservation Program measurement procedures
- Data Requirements for more detailed attribution of forecasted conservation savings



Staff Forecast Structure

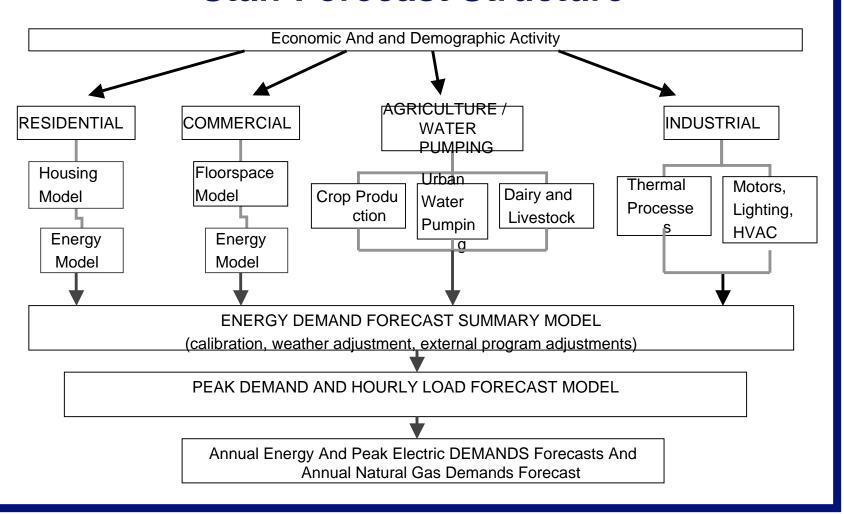



Efficiency Programs

- Most program impacts modeled explicitly in the Residential and Commercial Models
- Past impacts are incorporated implicitly in other sectors through calibration to actual energy use
- Historic and Projected impacts from committed efficiency programs not modeled in specific sector models are accounted for in the Summary Model
- Future staff work will allow explicit incorporation in the Industrial Model



Residential Model

- End-use model that forecasts residential energy use (electricity and natural gas) based on projections of number of households, appliance saturations, and appliance unit energy consumption (UEC)
- Incorporates the bulk of residential efficiency program impacts, through the introduction of building and appliance standards and various retrofit programs
- Efficiency program impacts are handled through adjustments to the UECs, given assumptions on penetration and compliance
- Sorting out impacts from individual programs requires adjusting for price and other market effects



Commercial Model

- End-use model that forecasts commercial energy use (electricity and natural gas) by projecting commercial floor space, portion of floor space devoted to each end-use, and end-use energy intensity (EUI)
- Incorporates the bulk of commercial efficiency program impacts, through the introduction of building and appliance standards and federal school and hospital programs
- Efficiency program impacts are handled through adjustments to the EUIs, given assumptions on penetration and compliance
- Sorting out impacts from individual programs requires adjusting for price and other market effects



Summary Model

- Combines the energy forecasts from all of the individual sectors
- Combined forecast adjusted for weather, unclassified consumption, and additional committed efficiency programs; calibrated to historical data
- Additional efficiency adjustment accounts for utility and public agency committed programs not easily incorporated in sector models
- Programs include master metering, industrial energy management and incentives, new construction, and various retrofit, among others
- To quantify programs, first-year impacts are assigned a useful measure life, then a degradation factor is applied to each year of useful life to account for poor maintenance or equipment failure.

Additional Documentation of Methods and Assumptions

Most recent <u>detailed</u> documentation of historic standards and programs


- Electricity Impacts From Historical, Existing, or Committed Statewide Demand Side Management (DSM) Programs, Staff Paper by Dennis Smith, publication # CEC-200-1995-901, March 1995. Posted August 7, 2008. (PDF file, 52 pages, 1.6 MB
- California Energy Demand: 1995-2015, Volume XI: Committed Demand Side Management Program Savings, Staff Report by Tom Gorin, Richard Rohrer, publication # P300-95-014, July 1995. Posted August 7, 2008. (PDF file, 154 pages, 1.5 MB)



Residential Model Components and Conservation Assumptions



Residential Energy Forecast Model

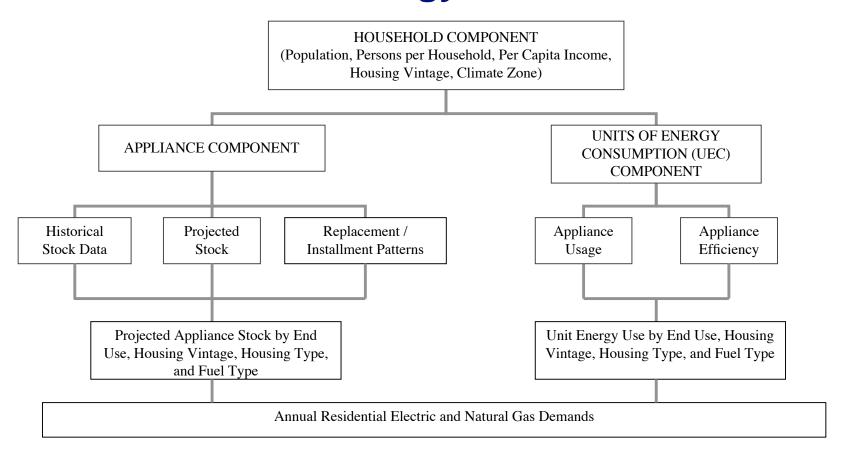



Benchmarks for Savings Estimates

- Savings estimates in appliances (due to standards and programs) are benchmarked to pre-1978 efficiencies.
- Savings estimates in building shell improvements for heating and cooling are benchmarked to pre-1975 construction practices.
- Savings for heating and cooling are a combination of both building shell improvements and appliance improvements.
- Savings are quantified by iteratively executing the Commercial and Residential Models and successively removing the effect of each standard and/or efficiency program.



Basic Savings Calculation Method (Residential)

Residential	Scenario	Forecast Input Values	Savings
Scenario #	Name		Calculation
1	Baseline	All programs in place for all	
		historic and forecast years	
2	2002	Efficiencies frozen at 2001	2- 1
	standards	levels for 2002 - 2018 period	
3	1998	Efficiencies frozen at 1997	3-2
	standards	levels for 1998 – 2018 period	
4	1992	Efficiencies frozen at 1991	4-3
	standards	levels for 1992 – 2018 period	
5	1984	Efficiencies frozen at 1983	5-4
	standards	levels of 1984 – 2018 period	
6	Retrofit	Retrofit weatherization	6-5
	programs	measures removed from pre 78	
7	1978	Eimiaiga diesnerszen at 1977	7-6
	standards	levels for 1978-2018 period	
8	Price impacts	Efficiencies and prices held	8-7
	and other	constant at 1975 level for 1976-	
	measures	2018 period	



End-Uses Affected by Appliance Standards (Appliances are tracked and decayed by year of purchase)

- Refrigerators (Standard and Frost Free)
- Freezers
- Room Air Conditioners
- Dishwasher Motors
- Dishwasher (water use)
- Clothes Washer (water use)
- Water Heaters

•




Normalized Use per Appliance Due to Standards (relative to year shown in yellow)

	l	1000	4070	4070	4000	4000	4007	4000	4000	0004 :
	year	pre 1960	1970			1983	1987	1990	1992	2001+
frost-free refrigerators	reduction factor	1.200	1.300	1.000	0.880	0.730	0.682	0.652	0.517	0.542
	year	pre 1960	1970	1978	1980	1986	1987	1989	1990	1992+
standard refrigerators	reduction factor	1.100	1.150	1.000	0.940	0.935	0.916	0.916	0.870	0.674
	year	pre 1979	1979	1983	1986	1987	1989	1990+		
freezers	reduction factor	1.000	0.940	0.825	0.800	0.773	0.773	0.652		
	year	pre 1981	1984+							
dish washer motor	reduction factor	1.000	0.900							
	year	pre 1980	1980+							
room A/C	reduction factor	1.000	0.820							
	year	pre 1980	1982	1987	1988	1991	1992	2005	2006+	
central A/C	reduction factor	1.000	0.770	0.770	0.740	0.740	0.672	0.672	0.517	
	year	pre 1981	1981+							
electric space heat	reduction factor	1.000	0.500							
oloculo opudo nout	- Cadeson lactor	1.000	0.000							
	year	pre 1980	1981	1991	1992+					
gas space heat	reduction factor	1.000	0.900	0.900	0.865					




Example of Frost-Free Refrigerator Forecast and Savings Calculation

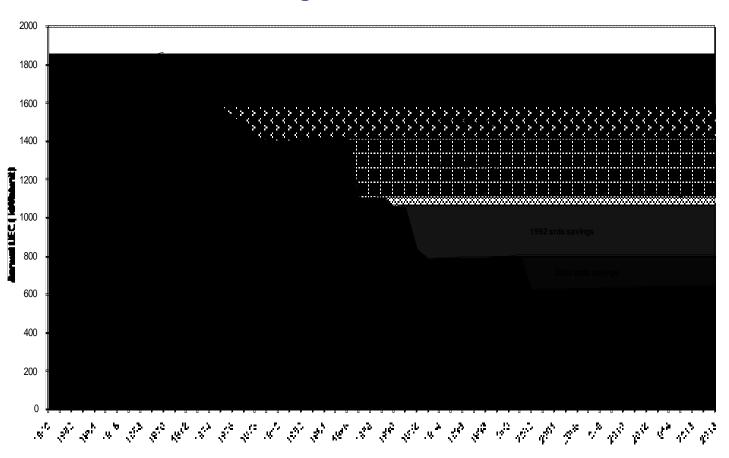



Example of Alternative Frost-Free Refrigerator Savings Calculation

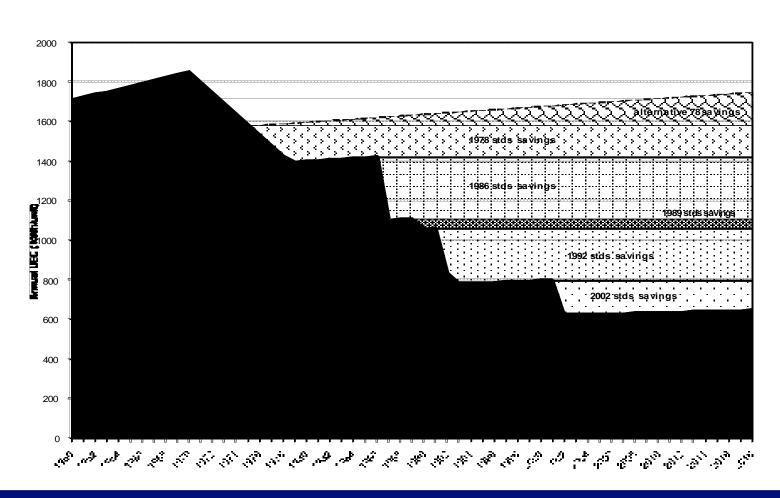



End-Uses Affected by Both Building and Appliance Standards (Households are tracked and decayed by year of construction)

- Space Heating (electric and natural gas)
- Central Air Conditioning
- Water Heating (from measures providing reductions in water use)



Reductions in Building Shell Heating Requirements (per square foot) Attributed to Residential Building Standards

			Housing Vintage						
Forecast Zone	Utility	Region	pre 1975	1975-78	1979-82	1983-92	1993+		
1	PG&E	North Coast and Mountain	1.0000	0.800	0.711	0.455	0.423		
2	PG&E	Sacramento	1.0000	0.833	0.738	0.478	0.430		
3	PG&E	North and South Valley	1.0000	0.833	0.739	0.472	0.425		
4	PG&E	East Bay	1.0000	0.833	0.727	0.427	0.410		
5	PG&E	San Francisco	1.0000	0.833	0.724	0.412	0.396		
6	SMUD	Sacramento	1.0000	0.833	0.753	0.494	0.445		
7	SCE	Southern San Joaquin	1.0000	0.833	0.705	0.441	0.396		
8	SCE	Coastal LA Basin	1.0000	0.833	0.694	0.468	0.449		
9	SCE	Inland LA Basin	1.0000	0.833	0.701	0.490	0.470		
10	SCE	Inland Empire	1.0000	0.833	0.713	0.524	0.503		
11	LADWP	Coastal LA	1.0000	0.833	0.694	0.483	0.464		
12	LADWP	Inland LA	1.0000	0.833	0.689	0.482	0.462		
13	SDG&E	San Diego	1.0000	0.833	0.689	0.462	0.444		




Reductions in Building Shell Cooling Requirements (per square foot) Attributed to Residential Building Standards

		Housing Vintage						
Forecast Zone	Utility	Region	pre 1975	1975-78	1979-82	1983-92	1993+	
1	PG&E	North Coast and Mountain	1.0000	0.909	0.875	0.719	0.719	
2	PG&E	Sacramento	1.0000	0.909	0.883	0.689	0.675	
3	PG&E	North and South Valley	1.0000	0.909	0.886	0.743	0.728	
4	PG&E	East Bay	1.0000	0.909	0.881	0.692	0.685	
5	PG&E	San Francisco	1.0000	0.909	0.873	0.740	0.740	
6	SMUD	Sacramento	1.0000	0.909	0.851	0.603	0.603	
7	SCE	Southern San Joaquin	1.0000	0.909	0.881	0.760	0.745	
8	SCE	Coastal LA Basin	1.0000	0.909	0.909	0.809	0.801	
9	SCE	Inland LA Basin	1.0000	0.909	0.908	0.812	0.796	
10	SCE	Inland Empire	1.0000	0.909	0.894	0.794	0.778	
11	LADWP	Coastal LA	1.0000	0.909	0.895	0.759	0.752	
12	LADWP	Inland LA	1.0000	0.909	0.898	0.817	0.801	
13	SDG&E	San Diego	1.0000	0.909	0.905	0.804	0.804	



Conservation Impacts by Program PG&E Residential

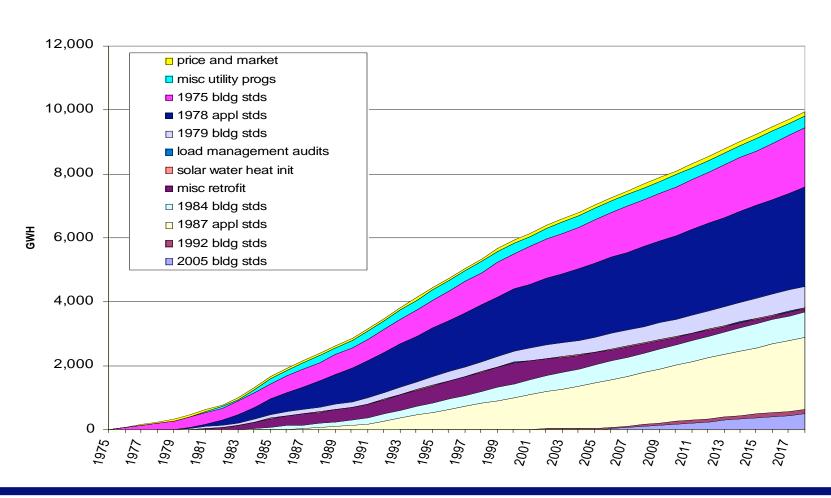



Stages of Additional Efficiency Program Measurement

- Goals: Developed from Potential Studies, Scenario Projects, etc.
- **Ex-ante Program Measurement:** Savings expected from a program in the planning stage.
- Ex-post Program Measurement: Actual savings from a program after it has been delivered (using Evaluation, Measurement, and Verification tools)
- Attribution Measurement: Attributing program savings vs. market, price or naturally occurring impacts (how the programs change the existing forecast)



Main Objectives of EM&V Projects

- Document and measure the impacts of a program and determine if it has met its goals with respect to being a reliable energy source
- To understand why the impacts occurred and determine ways to improve current programs and design future programs



Example of Impact Evaluation

• 2004-2005 Statewide Residential Retrofit Single-Family Energy Efficiency Rebate Program: Although 97% of the non-lighting measures were found to be installed, only 76% of the CFLs had been installed. Based on the measured savings results, the program met 50% of its ex-ante gross savings goals.



Data Requirements for More Detailed Attribution of Savings

- Detail of new and existing programs at the measure, enduse and housing/building type level. In order to determine which end-uses to make adjustments to in the forecast models
- Detail on existing market share of appliances by efficiency level compared to program projections.
- More detail on existing level of use by appliance and the distribution of use.